


UHF (860...930 MHz)
BIS VU-320-C0-S4
Order Code: BIS015Z



1) Sensing surface, 2) LED (Tag present), 3) LED (Power), 4) LED (Status), 5) LED (RF active), 6) Tightening torque, 7) Button (Config)

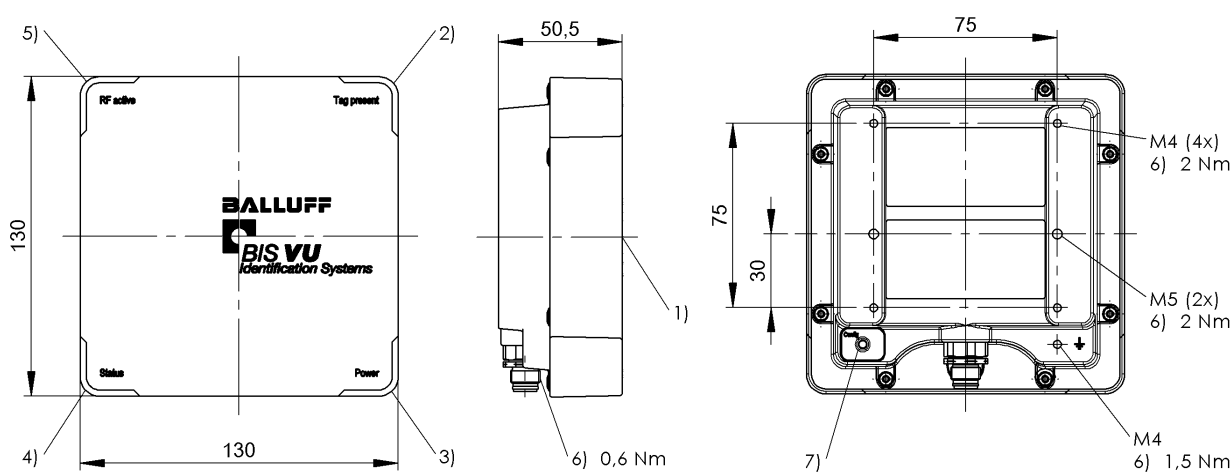

Basic features

Antenna type	Patch
Approval/Conformity	CE UKCA cULus WEEE
EN 55022	Size 1, Cl. B
Principle of operation	Read/write head
Radio license	Europe (CE) United Kingdom (UKCA)
Standards	EPCglobal™ Class 1, Gen 2 ISO 18000-6C

Display/Operation

Function indicator	Tag Present, LED yellow Power, LED green RF active, LED blue Status, LED red
--------------------	---

Electrical connection

Connection	M12x1-Male, 4-pin, A-coded
------------	----------------------------

Electrical data

Current consumption max. at 24 V DC	200 mA
EN 61000-4-2/3/4/5/6	Severity level 2B/2A/2A/-/3A
Front-to-back ratio	typ.10 dB
Multi-Tag capable	yes
Nominal voltage	24 VDC
Operating voltage Ub	24 V DC LPS Class 2
Output power adjustable	5 dBm...24 dBm (3.2 mW...250 mW)
Permissible radiated power	≤ 550 mW ERP
Polarization	circular
Residual ripple max.	10 %
Working frequency	865...868 MHz

Environmental conditions

Altitude max.	2000 m
Ambient temperature	-20...55 °C
Area of operation	Indoor
Contamination scale	2
Continuous shock load	yes
EN 60068-2-27, Shock	yes
EN 60068-2-32 Free fall	yes
EN 60068-2-6, Vibration	yes
IP rating	IP54
Relative humidity	0...90 %, non-condensing
Storage temperature	-25...70 °C

UHF (860...930 MHz)
BIS VU-320-C0-S4
Order Code: BIS015Z



Functional safety

MTTF (40 °C) 110 a

Interface

Interface 01 RS485

Material

Housing material PC, coated
ABS, Zinc, Die casting, (Connector)
Housing material, surface protection coated

Mechanical data

Application weight 850.00 g
Dimension 130 x 50.5 x 130 mm

Range/Distance


Axial ratio typ. 2 dB

Remarks

Use permitted only in EU member countries.
When installing, the technical standards and regulations of the corresponding countries must be observed.
Values are under rated conditions unless otherwise specified.
For more information about MTTF and B10d see MTTF / B10d Certificate


Indication of the MTTF- / B10d value does not represent a binding composition and/or life expectancy assurance; these are simply experiential values with no warranty implications. These declared values also do not extend the expiration period for defect claims or affect it in any way.

Connector Drawings

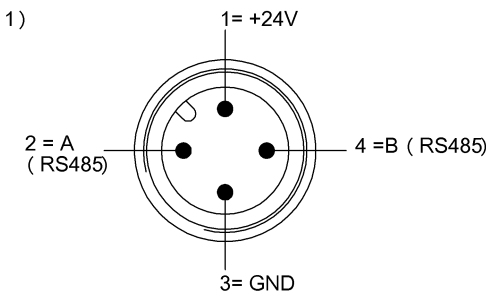

1) View towards connector

Technical Drawings

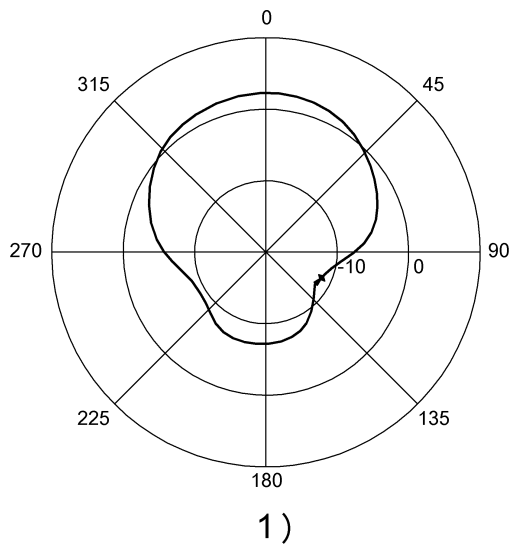

- 1) Radiation diagram horizontal
- 2) Radiation diagram vertical

